


ZTM80

► Rack Series

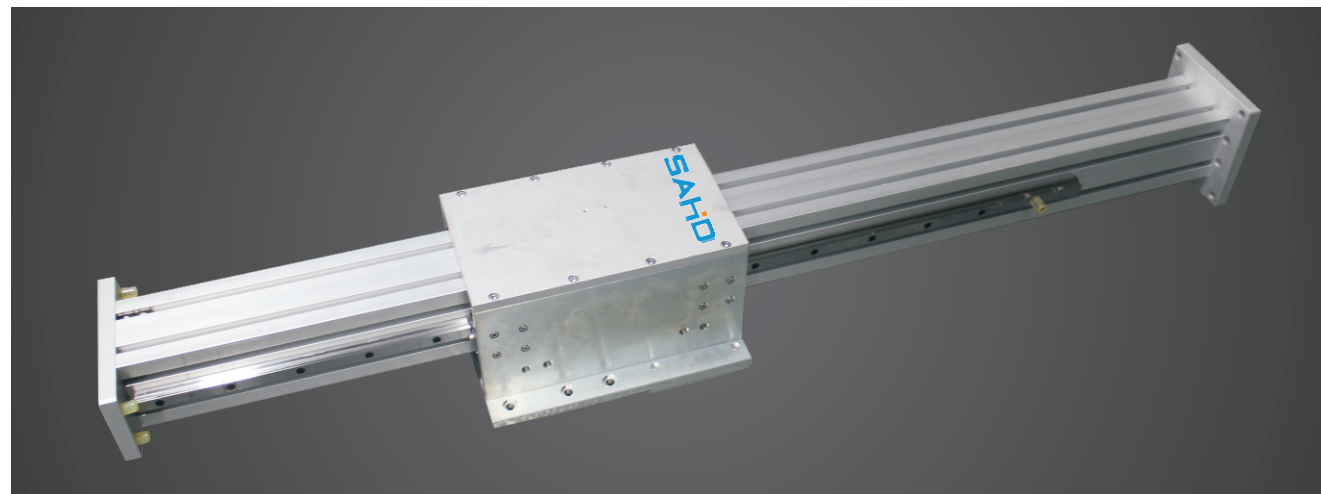

Max. Stroke1500mm

Max. Speed1000mm/s

Motor Capacity1000W

Belt Widthφ40MM

LinearGuideRail20*7.5-2PCS

Model Number Designation System

ZTM80 - T - P150 - S500 - 1000W

Model

Belt Type

TPU steel wire belt

XRubber belt

Belt Lead

150mm

50mm pitch

Stroke

100-2000mm

50mm pitch

Model Number Designation System				
Performance	Position Repetition Precision	±0.04	Max. Speed	1000
	Lead	150	Max.HandlingWeight	Horizontal Use80kg

Home 214Effective Stroke SEnd 214

Mechanical Limit 51

Download CAD drawings at www.dgshihai.com

306


250

137

单位 Unit:MM

有效行程	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
L	528	628	728	828	928	1028	1128	1228	1328	1428	1528	1628	1728	1828	1928	2028	2128	2228	2328	2428

ZTM100

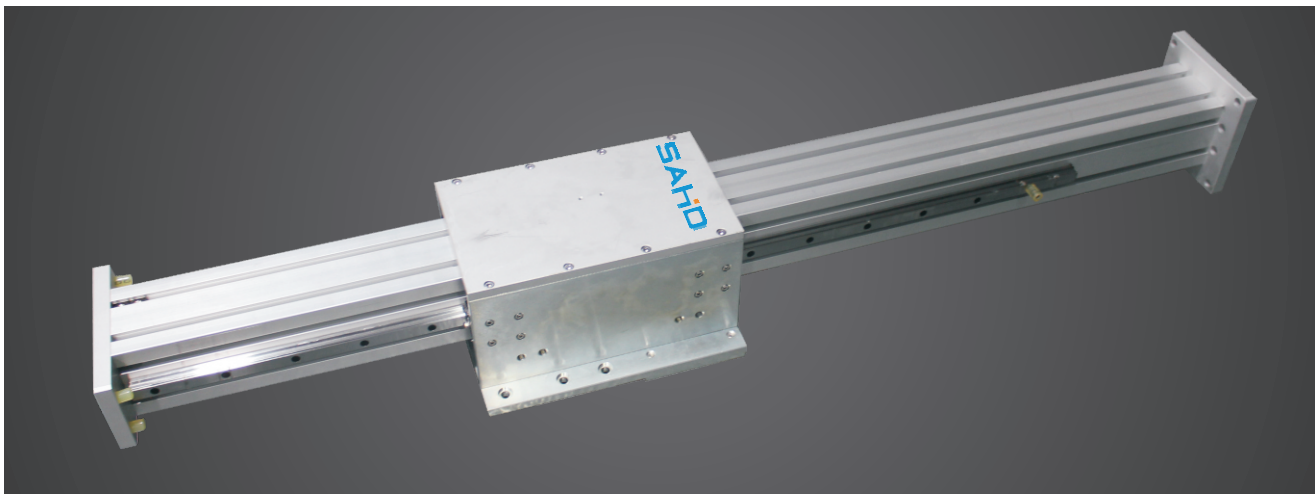

Max. Stroke1500mm

Max. Speed1000mm/s

Motor Capacity1000W

Belt Widthφ50MM

LinearGuideRail20*7.5-2PCS

Model Number Designation System

ZTM100 - T - P232 - S500 - 1000W

Model

Belt Type

TPU steel wire belt

XRubber belt

Belt Lead

232mm

50mm pitch

Stroke

100-2000mm

50mm pitch

Model Number Designation System				
Performance	Position Repetition Precision	±0.04	Max. Speed	1000
	Lead	232	Max.HandlingWeight	Horizontal Use120kg

Home 164Effective Stroke SEnd 164

Mechanical Limit 51

Download CAD drawings at www.dgshihai.com

206

181

118

单位 Unit:MM

有效行程	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
L	428	528	628	728	828	928	1028	1128	1228	1328	1428	1528	1628	1728	1828	1928	2028	2128	2228	2328

- European Standard Belt Drive Series
- Belt Drive Actuators / General Environments
- Belt Drive Actuators / General Environments
- Belt Screw Drive Actuators / Clean Room
- Belt Drive Actuators / Clean Room
- KK Series
- Built-in Actuators
- European Standard Ball Screw Drive Series
- Timing Belt Series
- Electric Actuator Series